

Latest Innovations

Innovative solutions developed across all areas of technology.

Product Catalogue

Blower

SE-BW-20
SE-BW-30
SE-BW-40
SE-BW-41
SE-BW-50
SE-BW-60
SE-BW-61
SE-BW-70
SE-BW-80
SE-BW-81
SE-BW-90
SE-BW-100

www.sediroglugroup.com

Sediroglu
GROUP machine

Technological Advantages

Across All Markets and Sectors

SE-BW BLOWER- APPLICATION OVERVIEW


The SE-BW BLOWER is engineered to provide powerful and stable air flow for pneumatic conveying systems in modern milling and industrial processing plants. Designed for efficient transportation of flour, semolina, grain, starch, and other dusty or granular materials, the SE-BW ensures continuous and reliable product movement across production lines. With its high-performance impeller and optimized airflow design, the blower generates consistent pressure while maintaining energy efficiency and low operational noise. Its heavy-duty steel construction guarantees durability under demanding industrial conditions, ensuring long-term performance with minimal maintenance requirements. The SE-BW BLOWER plays a critical role in pneumatic conveying systems by supporting smooth material transfer between silos, filters, cyclones, packaging units, and processing equipment. By maintaining stable air pressure and balanced airflow, it prevents material accumulation, improves process efficiency, and enhances overall plant productivity. Suitable for integration into new installations or existing systems, the SE-BW BLOWER offers dependable operation, reduced downtime, and optimized energy consumption in high-capacity bulk handling facilities.

FEATURES & ADVANTAGES

- ▶ High-efficiency airflow for pneumatic conveying systems
- ▶ Stable and continuous air pressure performance
- ▶ Supports smooth transfer of dusty and granular materials
- ▶ Heavy-duty industrial construction
- ▶ Energy-efficient operation with optimized power consumption
- ▶ Low noise and vibration levels
- ▶ Reduces material buildup and system blockages
- ▶ Easy integration into new or existing conveying lines
- ▶ Low maintenance requirements and long service life
- ▶ Enhances overall plant productivity and operational reliability

APPLICATION FIELDS



- ▶ Wheat flour mills
- ▶ Whole wheat flour milling plants
- ▶ Semolina (durum wheat) production lines
- ▶ Pasta flour production facilities
- ▶ Corn flour milling plants
- ▶ Rusk (galeta) flour mills
- ▶ Starch production plants
- ▶ Milling, sifting, and quality control sections
- ▶ Flour packaging lines
- ▶ Flour conveying lines
- ▶ Dusty product and granular material conveying lines
- ▶ Grain silos
- ▶ Grain storage facilities
- ▶ Cement factories

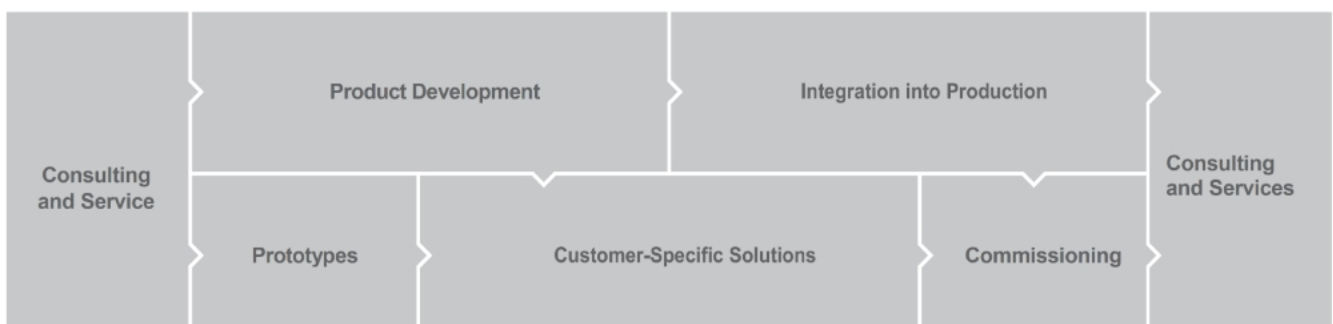



Technical Table

Blower

- 1- PIPE OF ASPIRATION
- 2- BLOWER
- 3- MOTOR ELECTRIC
- 4- FRAME
- 5- MANOMETER
- 6- SECURITY VALVE
- 7- ANTI-RETURN VALVE
- a- ASPIRATION OF CLEAN AIR
- b- OUTLET
- c- AIR OF OUTLET

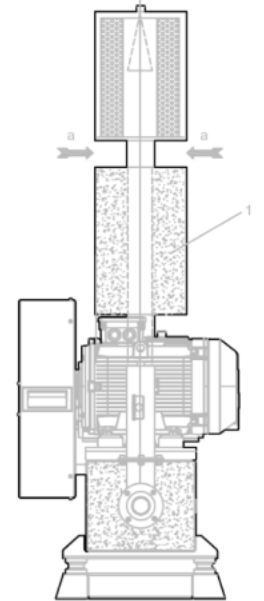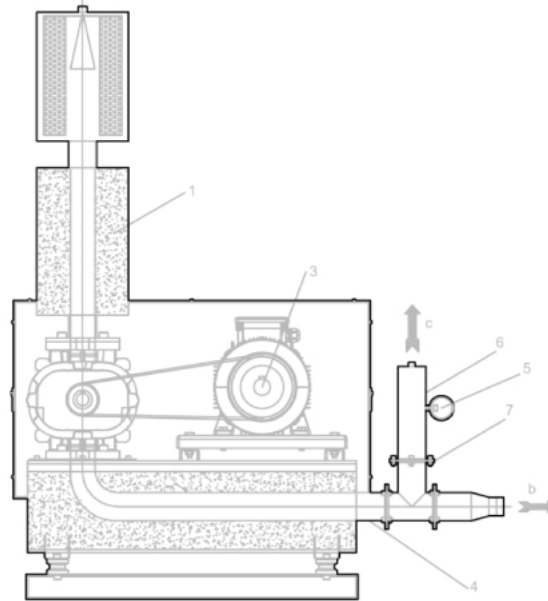

- 1- TUYAU D'ASPIRATION
- 2- SURPRESSEUR
- 3- MOTEUR ELECTRIQUE
- 4- CHASSI
- 5- MANOMETRE
- 6- VALVE DE SECURITE
- 7- VALVE ANTI-RETOUR
- a- ASPIRATION AIR PROPRE
- b- SORTIE
- c- AIR DE SORTIE

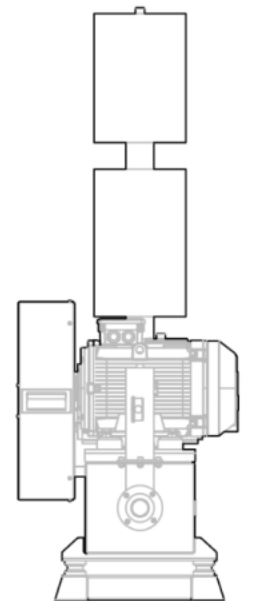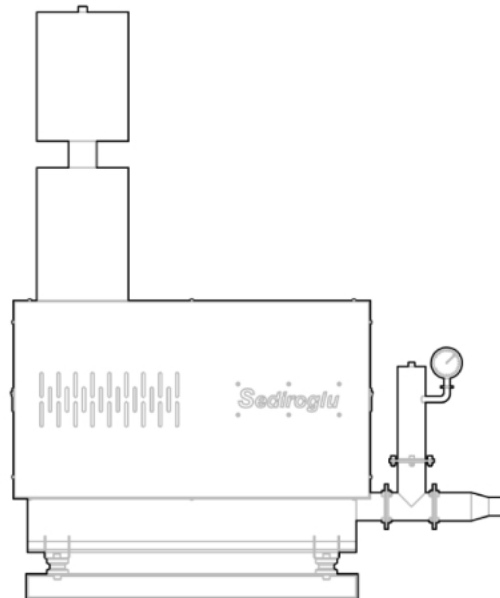

Technical Table

Blower



SE-BW Blower

Pression opérationnelle
 $P_1 = 1013 \pm 50$ mbar

Pressure operation
 $P_1 = 1.2 \pm 0.1$ kg/m³

$T_1 = 20^\circ \pm 5^\circ\text{C}$

MODEL MODELE		TECHNICAL FEATURES CARACTERISTIQUES TECHNIQUES																				
		SE-BW 20				SE-BW 30				SE-BW 40				SE-BW 41								
Δp (mbar)	Motor speed Vitesse de moteur Blower speed Vitesse de surpresseur	1500		1800		2200		3000		1500		1875		2100		2400		2680		3000		
		200	Q (m ³ /min)	1.3	1.7	2.2	2.7	3.3	3.9	4.5	5.1	2.1	2.9	3.3	3.9	4.5	5.1	2.8	3.8	4.4	5.2	5.9
	NMot (kw)	1.5	1.5	2.2	2.2	2.2	3.0	3.0	4.0	2.2	2.2	3.0	3.0	4.0	4.0	2.2	3.0	3.0	4.0	4.0	4.0	
	Δt (°C)	27	24	22	21	20	20	20	19	24	22	21	20	20	19	23	21	21	20	20	19	19
300	Q (m ³ /min)	1.1	1.5	2.0	2.6	3.1	3.7	4.3	4.9	1.9	2.7	3.1	3.7	4.3	4.9	2.6	3.5	4.1	4.9	5.6	6.5	
	NMot (kw)	1.5	2.2	2.2	3.0	3.0	4.0	4.0	5.5	2.2	3.0	3.0	4.0	4.0	5.5	3.0	4.0	4.0	5.5	5.5	5.5	
	Δt (°C)	46	40	36	34	32	31	30	30	39	35	34	32	31	30	38	34	33	32	31	30	29
400	Q (m ³ /min)	0.9	1.4	1.9	2.4	3.0	3.5	4.1	4.7	1.7	2.5	2.9	3.5	4.1	4.7	2.4	3.3	3.9	4.7	5.4	6.3	
	NMot (kw)	2.2	2.2	3.0	4.0	4.0	5.5	5.5	7.5	3.0	4.0	4.0	5.5	5.5	7.5	4.0	5.5	5.5	7.5	7.5	11.0	
	Δt (°C)	71	60	52	48	45	45	42	42	57	50	47	45	43	42	55	48	46	44	42	41	40
500	Q (m ³ /min)	1.2	1.8	2.3	2.8	3.4	3.9	4.6	5.5	1.6	2.3	2.8	3.4	3.9	4.6	2.2	3.2	3.7	4.5	5.3	6.1	
	NMot (kw)	3.0	4.0	4.0	5.5	5.5	7.5	7.5	11.0	4.0	5.5	5.5	7.5	7.5	11.0	5.5	7.5	7.5	11.0	11.0	15.0	
	Δt (°C)	82	70	63	59	56	54	54	54	78	66	62	59	56	54	74	64	60	57	55	53	
600	Q (m ³ /min)	1.6	2.2	2.7	3.3	3.8	4.4	5.1	5.9	1.4	2.2	2.6	3.2	3.8	4.4	3.0	3.6	4.4	5.1	5.9	6.7	
	NMot (kw)	4.0	4.0	5.5	5.5	7.5	7.5	11.0	15.0	4.0	5.5	5.5	7.5	7.5	11.0	7.5	7.5	11.0	11.0	15.0	15.0	
	Δt (°C)	89	80	84	84	84	84	84	84	103	85	79	73	70	67	81	76	71	68	65	62	
700	Q (m ³ /min)	2.1	2.5	3.1	3.7	4.3	4.9	5.5	6.1	2.1	2.5	3.1	3.7	4.3	4.9	3.4	4.2	4.9	5.8	6.7	7.5	
	NMot (kw)	5.5	7.5	7.5	11.0	11.0	15.0	15.0	15.0	5.5	7.5	7.5	11.0	11.0	15.0	11.0	11.0	15.0	15.0	15.0	15.0	15.0
	Δt (°C)	105	96	89	84	80	80	80	80	105	96	89	84	80	80	90	86	82	78	78	78	
800	Q (m ³ /min)	3.0	3.6	4.2	4.8	5.4	6.0	6.6	7.2	3.0	3.6	4.2	4.8	5.4	6.0	3.4	4.2	4.9	5.8	6.7	7.5	
	NMot (kw)	11.0	11.0	15.0	15.0	15.0	15.0	15.0	15.0	11.0	11.0	15.0	15.0	15.0	15.0	11.0	11.0	15.0	15.0	15.0	15.0	
	Δt (°C)	106	99	94	94	94	94	94	94	106	99	94	94	94	94	110	110	110	110	110	110	
900	Q (m ³ /min)	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	4.1	
	NMot (kw)	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	11.0	
	Δt (°C)	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105	105	
1000	Q (m ³ /min)																					
	NMot (kw)																					
	Δt (°C)																					



SE-BW Blower

Pression opérationnelle
 $P_1 = 1013 \pm 50$ mbar

Pressure operation
 $P_1 = 1013 \pm 50$ mbar

$T_1 = 20^\circ \pm 5^\circ C$

TECHNICAL FEATURES CARACTERISTIQUES TECHNIQUES

Δp (mbar)	SE-BW 50												SE-BW 60												SE-BW 61												SE-BW 70											
	1500			1875			2100			2400			2680			3000			1500			1680			1875			2100			2400			2680			3000											
Motor speed Vitesse de moteur	4.9	5.7	6.5	7.4	8.6	9.7	11.0	6.7	7.7	8.7	9.9	11.6	13.1	14.8	7.9	9.1	10.4	11.8	13.7	15.6	17.6	7.9	9.1	10.4	11.8	13.7	15.6	17.6	9.8	11.3	12.9	14.7	17.2	19.4	22.0	9.8	11.3	12.9	14.7	17.2	19.4	22.0						
Blower speed Vitesse de surpresseur	3.0	3.0	4.0	4.0	5.5	5.5	7.5	4.0	4.0	5.5	5.5	7.5	7.5	11.0	5.5	5.5	7.5	7.5	11.0	11.0	15.0	5.5	5.5	7.5	7.5	11.0	11.0	15.0	9.8	11.3	12.9	14.7	17.2	19.4	22.0	9.8	11.3	12.9	14.7	17.2	19.4	22.0						
Q (m³/min)	4.7	5.4	6.2	7.1	8.3	9.5	10.8	6.4	7.4	8.4	9.6	11.3	12.8	14.5	7.5	8.7	10.0	11.4	13.3	15.2	17.2	7.5	8.7	10.0	11.4	13.3	15.2	17.2	9.8	11.3	12.9	14.7	17.2	19.4	22.0	9.8	11.3	12.9	14.7	17.2	19.4	22.0						
NMot (kw)	4.0	5.5	5.5	7.5	7.5	11.0	11.0	5.5	7.5	7.5	11.0	11.0	11.0	15.0	7.5	7.5	11.0	11.0	11.0	15.0	15.0	7.5	7.5	11.0	11.0	11.0	15.0	15.0	11.0	11.0	11.0	11.0	11.0	15.0	15.0	11.0	11.0	11.0	11.0	11.0	15.0	15.0						
Δt (°C)	32	31	31	30	29	29	28	31	31	30	29	28	28	28	32	31	30	30	29	28	28	32	31	30	30	29	28	28	31	30	29	29	28	28	27	31	30	29	29	28	28	27						
Q (m³/min)	4.4	5.2	6.0	6.9	8.1	9.2	10.5	6.1	7.1	8.2	9.4	11.0	12.5	14.2	7.2	8.4	9.6	11.1	13.0	14.8	16.9	7.2	8.4	9.6	11.1	13.0	14.8	16.9	9.5	10.9	12.5	14.4	16.8	19.1	21.7	9.5	10.9	12.5	14.4	16.8	19.1	21.7						
NMot (kw)	5.5	7.5	7.5	11.0	11.0	15.0	15.0	7.5	11.0	11.0	15.0	15.0	15.0	22.0	11.0	11.0	15.0	15.0	15.0	22.0	11.0	11.0	15.0	15.0	15.0	22.0	11.0	11.0	15.0	15.0	15.0	22.0	15.0	15.0	15.0	15.0	15.0	22.0	22.0	15.0	15.0	15.0	15.0	15.0	22.0	22.0		
Δt (°C)	45	44	42	41	40	39	38	44	42	41	40	39	38	38	45	43	42	41	39	38	38	45	43	42	41	39	38	38	43	41	40	39	38	38	37	43	41	40	39	38	38	37						
Q (m³/min)	4.2	5.0	5.8	6.7	7.9	9.1	10.4	5.9	6.9	7.9	9.1	10.8	12.3	14.0	6.9	8.1	9.3	10.8	12.7	14.5	16.6	6.9	8.1	9.3	10.8	12.7	14.5	16.6	9.2	10.6	12.2	14.0	16.5	18.7	21.3	9.2	10.6	12.2	14.0	16.5	18.7	21.3						
NMot (kw)	7.5	7.5	11.0	11.0	15.0	15.0	15.0	11.0	11.0	11.0	15.0	15.0	15.0	22.0	11.0	11.0	15.0	15.0	15.0	22.0	11.0	11.0	15.0	15.0	15.0	22.0	15.0	15.0	15.0	15.0	15.0	22.0	30.0	15.0	15.0	15.0	15.0	15.0	22.0	30.0								
Δt (°C)	59	57	55	53	51	50	49	57	55	53	51	50	49	48	58	56	54	52	50	49	48	58	56	54	52	50	49	48	55	53	52	50	49	48	47	55	53	52	50	49	48	47						
Q (m³/min)	4.1	4.8	5.6	6.5	7.7	8.9	10.2	5.7	6.7	7.7	8.9	10.5	12.1	13.8	6.6	7.8	9.1	10.5	12.5	14.3	16.3	6.6	7.8	9.1	10.5	12.5	14.3	16.3	8.9	10.3	11.9	13.7	16.2	18.5	21.1	8.9	10.3	11.9	13.7	16.2	18.5	21.1						
NMot (kw)	7.5	11.0	11.0	15.0	15.0	15.0	15.0	11.0	11.0	15.0	15.0	15.0	15.0	22.0	15.0	15.0	15.0	15.0	15.0	22.0	15.0	15.0	15.0	15.0	15.0	22.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0								
Δt (°C)	74	71	68	65	63	61	60	71	68	65	63	61	60	58	72	69	66	64	62	60	59	72	69	66	64	62	60	59	68	66	63	62	60	59	57	68	66	63	62	60	59	57						
Q (m³/min)	3.9	4.6	5.4	6.3	7.6	8.7	10.0	5.5	6.5	7.5	8.7	10.4	11.9	13.6	6.6	7.8	9.1	10.5	12.5	14.3	16.3	6.6	7.8	9.1	10.5	12.5	14.3	16.3	8.6	10.1	11.7	13.5	15.9	18.2	20.8	8.6	10.1	11.7	13.5	15.9	18.2	20.8						
NMot (kw)	11.0	11.0	11.0	15.0	15.0	18.5	18.5	11.0	15.0	15.0	18.5	18.5	22.0	30.0	15.0	15.0	15.0	18.5	18.5	22.0	15.0	15.0	15.0	18.5	18.5	22.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0								
Δt (°C)	90	85	81	78	75	73	71	85	81	78	75	73	71	69	85	81	78	75	73	71	69	85	81	78	75	73	71	69	82	78	76	73	71	69	68	82	78	76	73	71	69	68						
Q (m³/min)	3.8	4.5	5.3	6.2	7.4	8.6	9.9	5.5	6.5	7.5	8.7	10.4	11.7	13.4	6.6	7.8	9.1	10.5	12.5	14.3	16.3	6.6	7.8	9.1	10.5	12.5	14.3	16.3	8.4	9.8	11.4	13.2	15.7	17.9	20.5	8.4	9.8	11.4	13.2	15.7	17.9	20.5						
NMot (kw)	11.0	11.0	15.0	15.0	18.5	18.5	22.0	11.0	15.0	15.0	18.5	18.5	22.0	30.0	15.0	15.0	15.0	18.5	18.5	22.0	15.0	15.0	15.0	18.5	18.5	22.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0								
Δt (°C)	104	101	96	91	87	84	82	104	101	96	91	87	84	82	104	101	96	91	87	84	82	104	101	96	91	87	84	82	108	106	101	98	94	91	89	108	106	101	98	94	91	89						
Q (m³/min)	5.1	6.1	7.3	8.4	9.7	5.1	6.1	7.3	8.4	9.7	5.1	6.1	7.3	8.4	9.7	5.1	6.1	7.3	8.4	9.7	5.1	6.1	7.3	8.4	9.7	5.1	6.1	7.3	8.4	9.7	8.1	9.6	11.2	13.0	15.4	17.7	20.3	8.1	9.6	11.2	13.0	15.4	17.7	20.3				
NMot (kw)	15.0	15.0	18.5	22.0	30.0	15.0	15.0	18.5	22.0	30.0	15.0	15.0	18.5	22.0	30.0	15.0	15.0	18.5	22.0	30.0	15.0	15.0	18.5	22.0	30.0	15.0	15.0	18.5	22.0	30.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0	18.5	18.5	18.5	18.5	18.5	22.0	30.0				
Δt (°C)	107	105	100	96	94	107	105	100	96	94	107	105	100	96	94	107	105	100	96	94	107	105	100	96	94	107	105	100	96	94	12.8	15.2	17.5	20.1	12.8	15.2	17.5	20.1	12.8	15.2	17.5	20.1						
Q (m³/min)	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	7.1	8.3	9.6	37.0	45.0	45.0	55.0	37.0	45.0	45.0	55.0										
NMot (kw)	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	22.0	22.0	30.0	106	106	106	103	106	106	106	103										
Δt (°C)	109	105	105	109	105	105	109	105	105	109	105	105	109	105	105	109	105	105	109	105	105	109	105	105	109	105	105	106	106	106	103	106	106	106	103													

Technical Table

Blower



SE-BW Blower

Pressure operation
 $\rho_1 = 1.2 \pm 0.1 \text{ kg/m}^3$

Pression opérationnelle
 $P_1 = 1013 \pm 50 \text{ mbar}$

$T_1 = 20^\circ \pm 5^\circ \text{C}$

MODEL MODELE		TECHNICAL FEATURES CARACTERISTIQUES TECHNIQUES																													
		SE-BW 80				SE-BW 81				SE-BW 90				SE-BW 100																	
ΔP (mbar)	Motor speed Vitesse de moteur Blower speed Vitesse de surpresseur Q (m ³ /min)	1500			3000			1500			3000			1500			3000														
		200	Q (m ³ /min)	15.5	17.7	20.0	22.7	26.3	29.7	33.5	19.6	22.4	25.4	28.9	33.6	38.0	43.0	18.7	21.4	24.3	27.5	31.2	36.1	40.7	41.9	24.7	28.1	32.0	36.2	41.0	47.4
	NI Mot (kw)	11.0	11.0	11.0	11.0	15.0	15.0	18.5	11.0	11.0	15.0	15.0	18.5	22.0	30.0	11.0	11.0	15.0	15.0	18.5	22.0	30.0	30.0	15.0	15.0	18.5	18.5	22.0	30.0	37.0	37.0
	ΔT (°C)	19	19	19	18	18	18	18	20	19	19	19	18	18	18	19	19	19	18	18	18	18	18	19	19	18	18	18	18	18	18
300	Q (m ³ /min)	14.9	17.1	19.4	22.1	25.7	29.1	32.9	18.7	21.5	24.6	28.1	32.8	37.1	42.1	18.0	20.6	23.6	26.8	30.5	35.4	40.0	41.1	23.8	27.2	31.1	35.3	40.1	46.5	52.5	54.0
	NI Mot (kw)	11.0	15.0	18.5	18.5	22.0	30.0	30.0	15.0	18.5	18.5	22.0	30.0	30.0	37.0	15.0	18.5	18.5	22.0	30.0	30.0	37.0	37.0	18.5	22.0	30.0	30.0	30.0	37	45	45.0
	ΔT (°C)	30	29	29	28	28	27	27	31	30	30	29	28	28	28	30	30	29	28	28	28	27	27	30	29	29	28	28	27	27	27
400	Q (m ³ /min)	14.5	16.6	19.0	21.7	25.3	28.6	32.5	18.0	20.8	23.9	27.4	32.0	36.4	41.4	17.4	20.0	23.0	26.2	29.9	34.8	39.4	40.5	23.1	26.5	30.3	34.5	39.3	45.8	51.7	53.2
	NI Mot (kw)	15.0	18.5	18.5	22.0	30.0	30.0	37.0	22.0	22.0	30.0	30.0	37.0	45.0	55.0	18.5	22.0	30.0	30.0	30.0	37.0	45.0	45.0	30.0	30.0	30.0	37.0	45.0	55.0	55.0	55.0
	ΔT (°C)	41	40	39	38	38	37	37	43	42	41	40	39	38	37	42	41	40	39	38	37	37	37	41	40	39	38	38	37	37	37
500	Q (m ³ /min)	14.1	16.2	18.6	21.3	24.9	28.2	32.1	17.4	20.2	23.2	26.7	31.4	35.8	40.8	16.9	19.5	22.4	25.6	29.3	34.3	38.8	40.0	22.4	25.8	29.7	33.9	38.7	45.1	51.1	52.6
	NI Mot (kw)	22.0	22.0	30.0	30.0	37.0	45.0	55.0	30.0	30.0	30.0	37.0	45.0	55.0	55.0	30.0	30.0	30.0	37.0	45.0	55.0	55.0	55.0	30.0	37.0	45.0	45.0	55.0	55.0	75.0	75.0
	ΔT (°C)	53	51	50	49	48	47	46	56	54	52	51	49	48	47	54	52	51	50	49	48	47	47	53	51	50	49	48	47	46	46
600	Q (m ³ /min)	13.7	15.8	18.2	20.9	24.5	27.8	31.7	16.8	19.6	22.6	26.1	30.8	35.2	40.2	16.4	19.0	22.0	25.2	28.8	33.8	38.4	39.5	21.8	25.2	29.1	33.3	38.1	44.5	50.5	52.0
	NI Mot (kw)	22.0	30.0	30.0	30.0	37.0	45.0	55.0	30.0	37.0	37.0	45.0	55.0	55.0	75.0	30.0	30.0	37.0	45.0	45.0	55.0	75.0	75.0	37.0	45.0	45.0	55.0	55.0	75.0	90.0	90.0
	ΔT (°C)	65	63	61	60	58	57	56	69	66	64	62	60	59	58	67	64	62	61	59	58	57	57	65	63	61	60	59	57	56	56
700	Q (m ³ /min)	13.3	15.5	17.8	20.5	24.1	27.5	31.3								15.9	18.6	21.5	24.7	28.4	33.3	37.9	39.1	21.3	24.7	28.5	32.7	37.5	43.9	49.9	51.4
	NI Mot (kw)	30.0	30.0	37.0	37.0	45.0	55.0	55.0								30.0	37.0	45.0	45.0	55.0	75.0	75.0	75.0	45.0	45.0	55.0	55.0	75.0	75.0	90.0	90.0
	ΔT (°C)	78	75	73	71	69	68	67								80	77	74	72	70	68	67	67	78	75	73	71	69	68	67	66
800	Q (m ³ /min)	13.0	15.2	17.5	20.2	23.8	27.2	31.0								15.5	18.1	21.1	24.3	28.0	32.9	37.5	38.6	20.7	24.2	28.0	32.2	37.0	43.4	49.4	50.9
	NI Mot (kw)	30.0	37.0	37.0	45.0	55.0	55.0	75.0								37.0	45.0	45.0	55.0	75.0	75.0	75.0	75.0	45.0	55.0	75.0	75.0	75.0	90.0	110.0	110.0
	ΔT (°C)	90	88	85	83	80	78	77								94	90	86	84	81	79	78	77	90	88	85	82	80	78	77	76
900	Q (m ³ /min)															15.1	17.7	20.7	23.9	27.6	32.5	37.1	38.2								
	NI Mot (kw)															45.0	45.0	55.0	75.0	75.0	75.0	75.0	90.0								
	ΔT (°C)															104	103	99	96	93	90	88	88								
1000	Q (m ³ /min)																														
	NI Mot (kw)																														
	ΔT (°C)																														

SEDIROGLU GROUP DELIVERS COMPLETE SOLUTIONS ACROSS VARIOUS INDUSTRIES, COMBINING DEEP TECHNICAL EXPERTISE WITH A DIVERSE AND EXTENSIVE PRODUCT RANGE TO MEET A WIDE SPECTRUM OF CUSTOMER NEEDS.

FACING A DEVELOPMENT CHALLENGE? WE PROVIDE THE SOLUTION.
AT SEDIROGLU GROUP, OUR EXPERIENCED R&D TEAM IS COMMITTED TO CONTINUOUS IMPROVEMENT.
MANY INDUSTRY INNOVATIONS HAVE ORIGINATED FROM OUR COMPANY.
WE ARE DRIVEN BY A FORWARD-THINKING MINDSET AND A PIONEERING SPIRIT IN EVERY STEP WE TAKE.

CONTACT – WORLDWIDE

With 12 branches around the world and marketing teams in over 70 countries, we provide you with outstanding service worthy of a technology leader.

We look forward to hearing from you!

<https://sediroglugroup.com/contact>



AT YOUR SERVICE 24/7 – OUR VIRTUAL BOOTH

With impressive features like animated shots, clickable hotspots, and rotatable 3D models, we are confident our online presentations will truly impress you.

<https://sediroglugroup.com/products>



DISCOVER MORE ABOUT THIS PRODUCT

Scan the QR code to access detailed technical specifications, application insights, high-quality visuals, and interactive digital content related to this product.

<https://sediroglugroup.com/products/blower>



HEAD OFFICE:
SEDIROGLU GROUP
Turkey, Çorum
T +90 541 620 03 22
E Mail : info@sediroglu.com
E Mail : info@sediroglugroup.com

www.sediroglugroup.com

Sediroglu
GROUP machine